


THIN BRANCHES BY 1/3 RETAINING ORIGINAL PLANT SIZE AND FORM TYPICAL OF SPECIES

100mm OF SHREDDED BARK MULCH OR AS SPECIFIED, IN 100mm DEEP SAUCER

MAINTAIN ORIGINAL GRADE OF SHRUB BASE AFTER PLANTING

BALL & BURLAP - CUT AND REMOVE BURLAP FROM TOP 1/3 OF ROOT BALL BARE ROOT - SPREAD ROOTS EVENLY OVER TAMPED MOUND OF PLANTING SOIL. WORK SOIL BETWEEN ROOTS

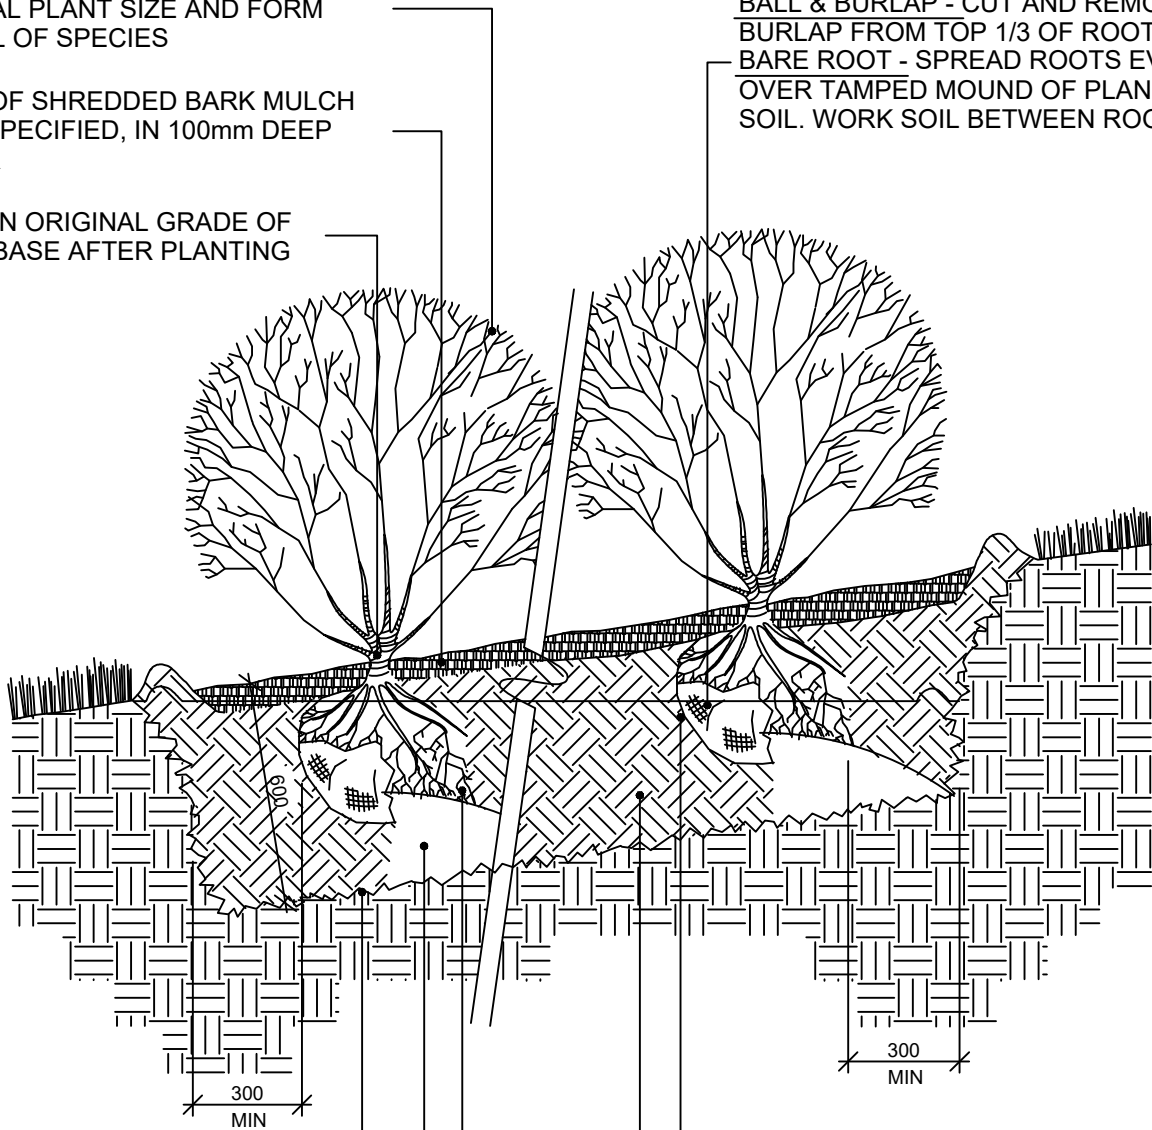


SCARIFY EDGES OF PIT

MIN. 150mm TAMPED MOUND OF PLANTING SOIL TO PREVENT SETTLEMENT

CLEANLY PRUNE ALL DAMAGED ROOT ENDS

WASH PLANTING SOIL INTO SPACES AROUND ROOT BALL

PREPARED PLANTING SOIL MIXTURE AS SPECIFIED



OPERATIONS SECTION

PLANTING - SHRUB, CONTINUOUS BED

DWG. No.

AS-703

DATE

SEPT. 2020

REVISION No.