


ALL DIMENSIONS IN MILLIMETRES AND/OR METRES, DRAWING NOT TO SCALE

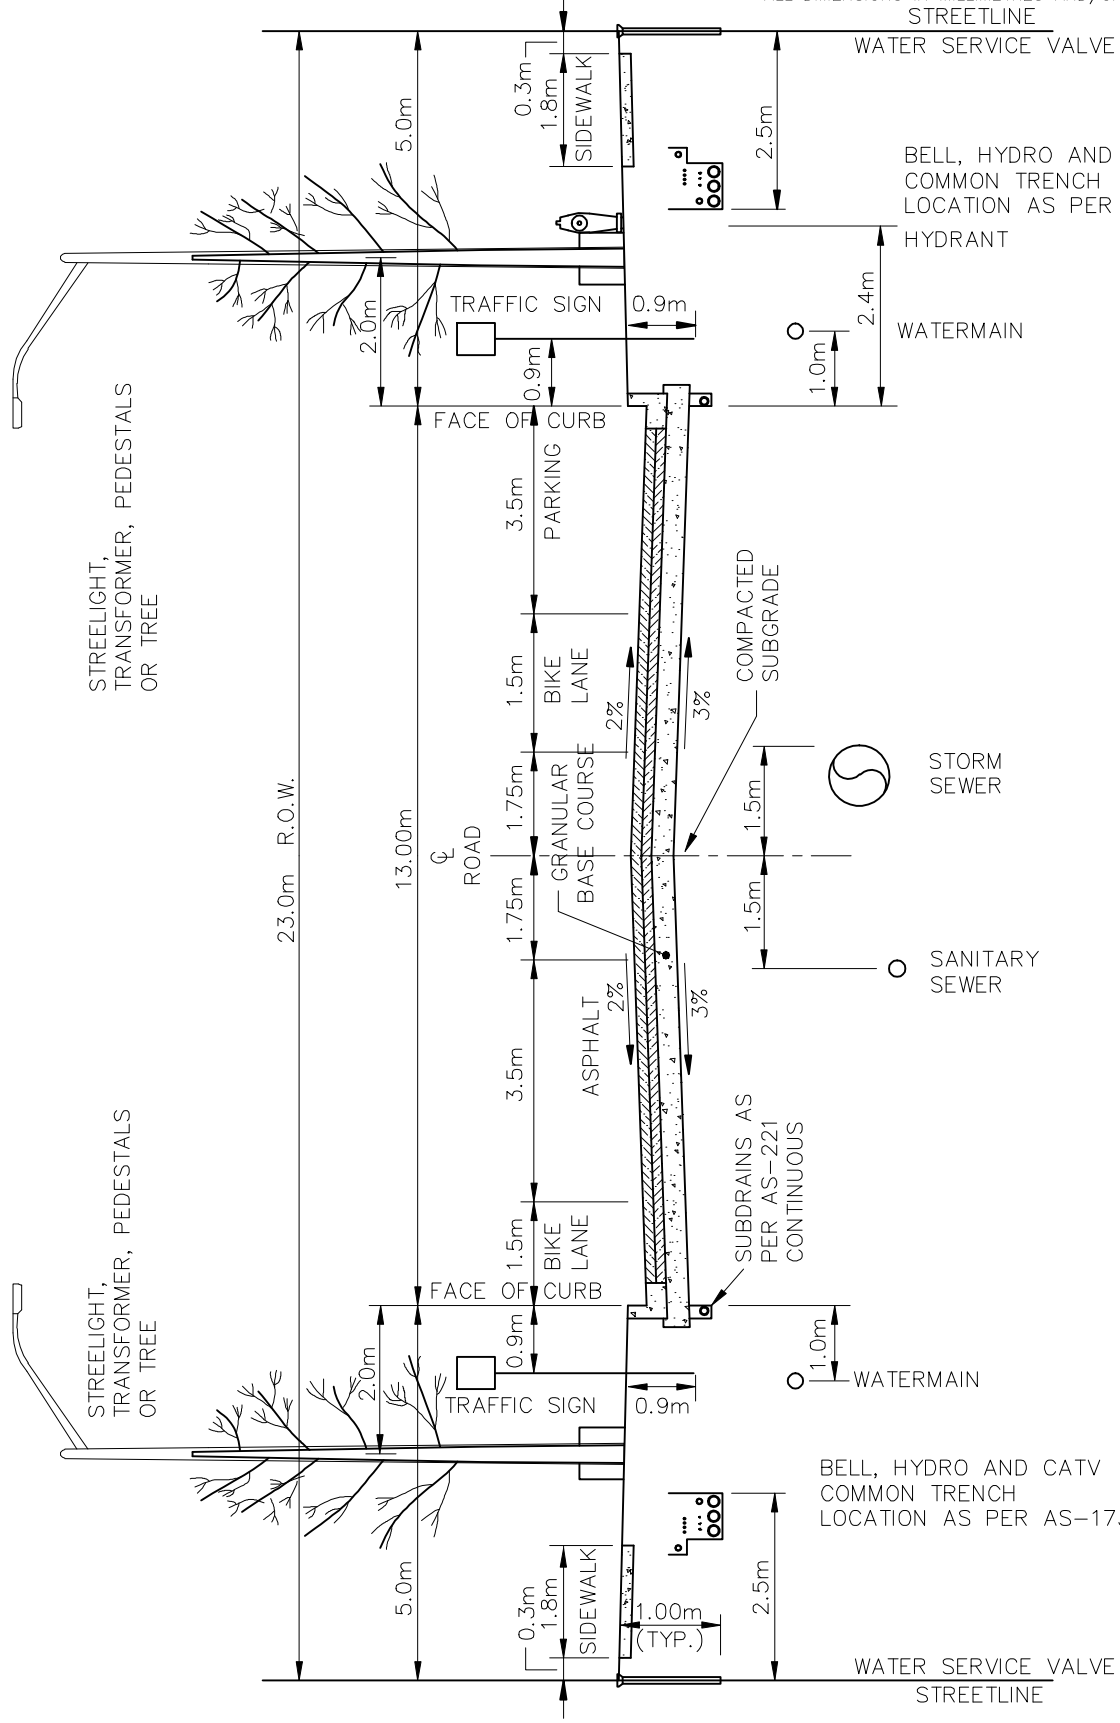


- NOTE:
1. ALTERNATIVE UTILITY LOCATION SUBJECT TO TOWN APPROVAL.
  2. REFER TO DESIGN CRITERIA SECTION B FOR PAVEMENT DESIGN REQUIREMENTS.
  3. COMMON TRENCH AS PER AS 173
  4. BOULEVARD GRADE 2% MIN 5% MAX DIRECTED TOWARDS THE ROAD

**MINIMUM PAVEMENT DESIGN**

ASPHALT - 40mm HL3 OR HL1 SURFACE  
100mm HL8 BINDER

MINIMUM GRANULAR  
BASE COURSE - 150mm GRANULAR 'A'  
450mm GRANULAR 'B'  
OR GBE = 730

SUBGRADE COMPACTED TO 95% S.P.D.  
COMPACTION FOR ASPHALT AND GRANULAR AS PER OPSS



**13.0m COLLECTOR ROADWAY  
23.0m RIGHT-OF-WAY**

DWG. No.	<b>AS-204</b>
DATE	JANUARY 2011
REVISION No.	

ENGINEERING SECTION