


TEMPORARY GRAVEL ACCESS

250mm CRUSHED LIMESTONE
 350mm GRANULAR 'B'
 SUBGRADE COMPACTED TO 95% STANDARD PROCTOR
 DENSITY AS PER OPSS 501.08.02

PLAN

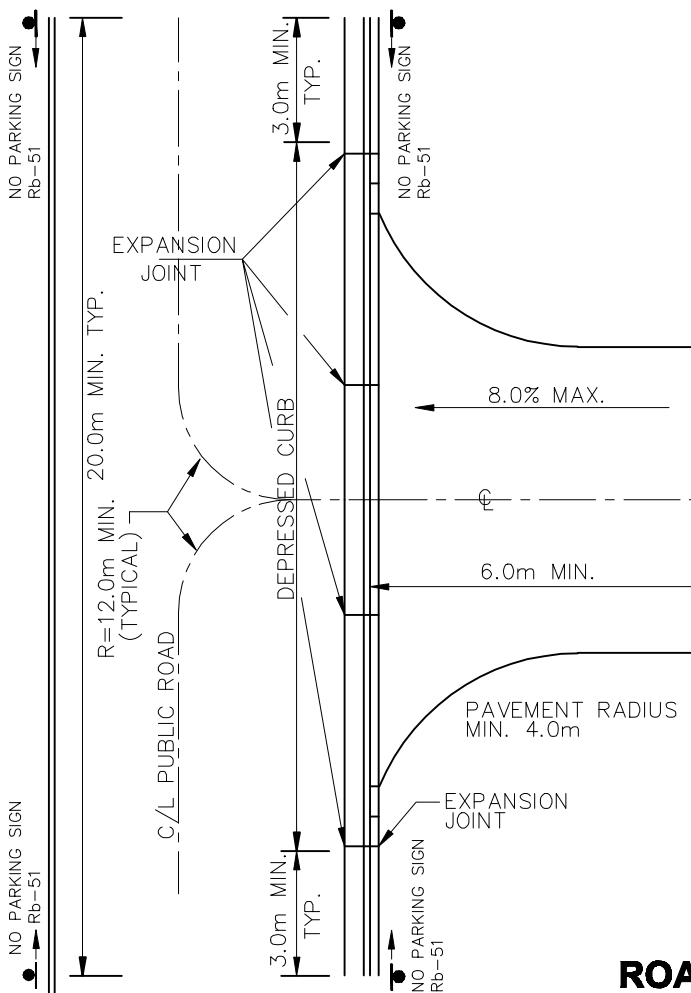



150mm HIGH CONC. BARRIER CURB OR MOUNTABLE CURB WHERE REQUIRED

NOTE: PROVIDE ACCESS ROUTE LIGHTING AS DIRECTED BY THE TOWN

MINIMUM PAVEMENT DESIGN

40mm HL3 ASPHALT SURFACE COURSE
 50mm HL8 ASPHALT BASE COURSE
 150mm GRAN.'A'
 300mm GRAN.'B' } OR 300mm CRUSHED LIMESTONE
 DESIGN FOR 11,000 Kg AXLE LOAD
 SUBGRADE COMPACTED TO 95% STANDARD PROCTOR DENSITY AS PER OPSS 501.08.02

ROAD SECTION

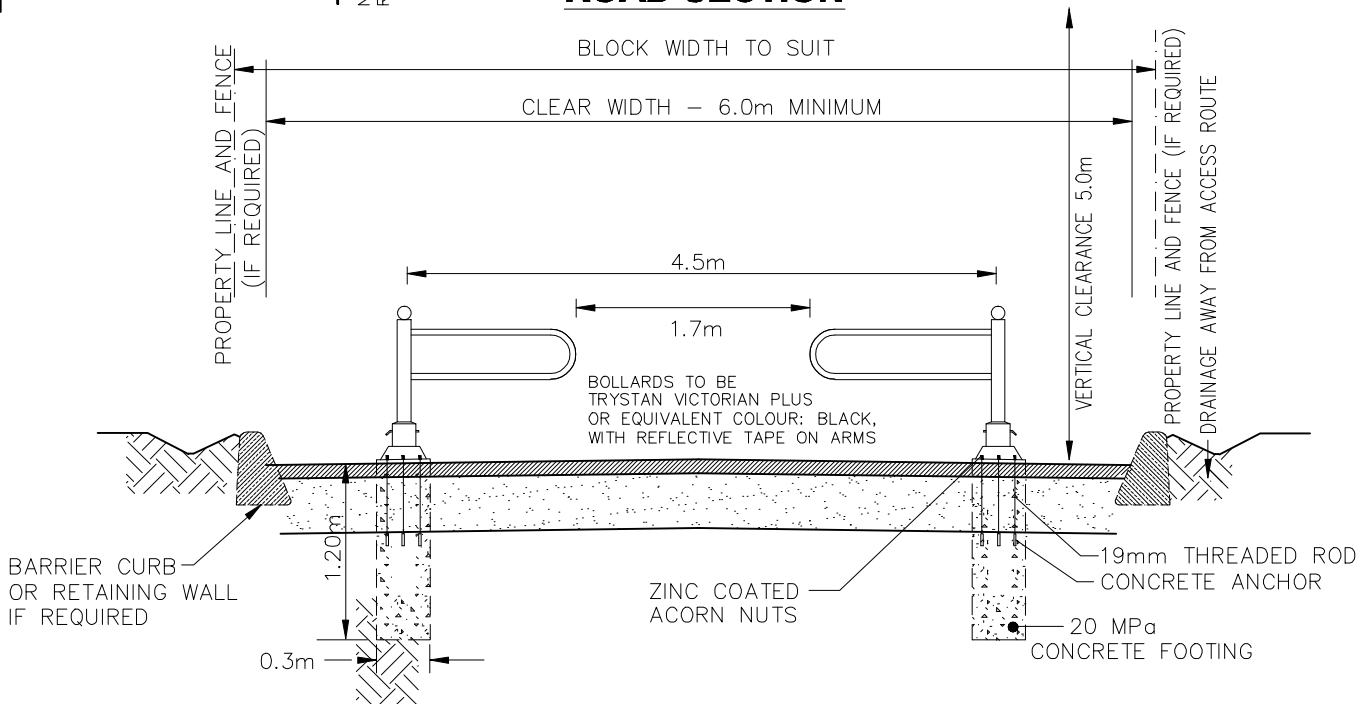

ENGINEERING SECTION

SECONDARY EMERGENCY ACCESS ROUTE

DWG. No.

AS-322

DATE

JANUARY 2011

REVISION No.